


## BEST 3 SUBMERSIBLE ELECTRIC PUMP / DSP40 CONNECTION

<https://www.securhit.com/en/dewatering-pumps/1067-electropompe-submersible-best-3-raccord-dsp40.html>

BEST 3 Submersible Pump AISI 304 Stainless Steel □ Drainage, Irrigation & Water Lifting

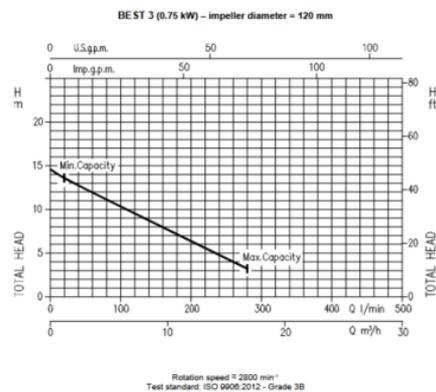

### Description

The BEST 3 submersible pump in AISI 304 stainless steel is suitable for domestic applications and large industrial drainage systems. It is designed for lifting water from flooded premises, transferring water, small fountains and small-scale irrigation. The double mechanical seal ensures long service life and high reliability.

#### TECHNICAL DESCRIPTION :

- Pump body, impeller and casing in AISI 304 stainless steel
- AISI 303 stainless steel shaft
- Double mechanical seal and intermediate oil chamber: SiC/SiC/NBR on pump side and Carbon/Ceramic/NBR on motor side
- 2-pole asynchronous motor
- Class F insulation
- IP68 protection
- Single-phase voltage 230V - 50Hz
- Permanent capacitor and built-in thermal protection
- Maximum immersion depth: 10 metres
- Maximum flow diameter: 10 mm
- Maximum temperature of pumped liquid: 35°C for domestic use in accordance with standard EN 60335-2-41 and 50°C for other uses
- Power: 0.55 kW (0.75 HP)
- Supplied with 10 m of HO7 RN-F cable
- Max. flow rate : 18m<sup>3</sup>/h

With DSP40 connection.

## **Caractéristiques**

- Dimensions : 352 x 315 x Ø 210 mm
- Weight : 12,7 kg
- Débit max. : 18 m<sup>3</sup>/h ou 300 L/min