


## BEST 4 SUBMERSIBLE ELECTRIC PUMP / DSP40 FITTING

<https://www.securhit.com/en/dewatering-pumps/112-electropompe-submersible-best-4-raccord-dsp40.html>

BEST 4 Submersible Pump □ Drainage, Water Lifting & Domestic/Industrial Emptying

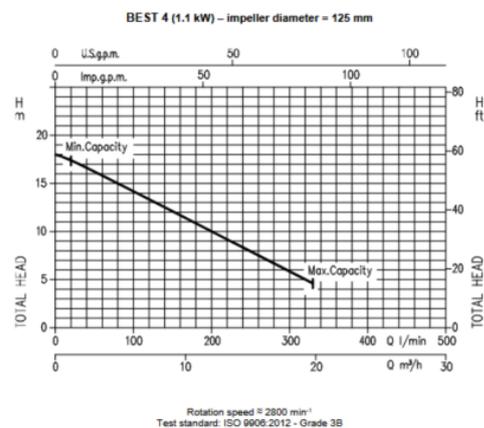

### Description

The BEST 4 submersible pump is designed for infiltration water lifting, basement, garage, and cellar emptying, as well as small to medium construction site drainage. Versatile, it can be installed as a fixed or mobile system, with or without a float switch, depending on your needs.

#### Key Benefits:

- Durable AISI 304 stainless steel construction, resistant to corrosion and humid environments
- Double mechanical seal with oil chamber for maximum reliability
- Single-phase motor with permanent capacitor and built-in thermal-overload protection with automatic reset
- Supplied with 10 m H07 RN-F power cable
- Suitable for liquids up to 35°C and solids up to 10 mm
- Maximum immersion: 7 m
- Maximum head (HMT): 19 m

#### Technical Specifications:

- Pump body, impeller, suction grille, motor cover, seal support disk, and motor casing: AISI 304 stainless steel (EN 1.4301)
- Shaft: AISI 303 stainless steel (EN 1.4305)
- Mechanical seal: upper Carbon/Ceramic/NBR (motor side), lower SiC/SiC/NBR (pump side)
- Poles: 2
- Insulation class: F
- Protection rating: IP68
- Voltage: Single-phase 1~230 V ± 10 % / Three-phase 3~400 V ± 10 %

- Maximum solid passage: 10 mm
- Maximum liquid temperature: 35°C
- Fitting supplied: DSP40
- Maximum flow : 22m<sup>3</sup>/h

## **Caractéristiques**

- Weight : 13.8 kg
- Height : 340 mm
- Maximum flow : 22 m<sup>3</sup>/h