


## MAST K2 DEWATERING PUMP MAXIMUM FLOW RATE 250 L/MIN

<https://www.securhit.com/en/dewatering-pumps/1232-pompe-d-epuisement-mast-k2-debit-max-250-l-min.html>

MAST K2 Dewatering Pump □ Mobile and Robust for Dirty Water

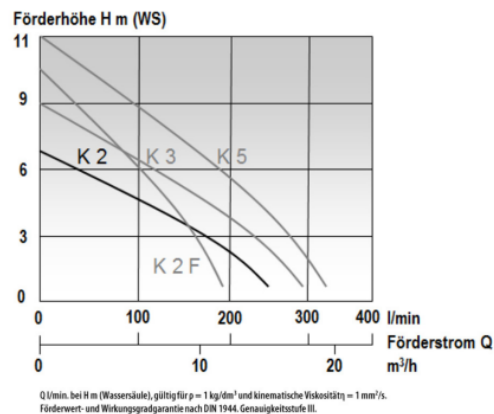

## Description

The MAST K2 dewatering pump is designed for efficient pumping of dirty and wastewater in demanding environments. Compact and lightweight, it combines performance, durability, and mobility, featuring a fiberglass-reinforced plastic body and a stainless steel motor housing. The triple mechanical shaft seal ensures safe operation and long service life, even under challenging conditions.

The K2 is particularly suited for mobile pumping of basements, flooded areas, or rainwater, allowing for quick and reliable operation right after plugging in.

## TECHNICAL SPECIFICATIONS

### MOTOR

- Power supply: 230 V
- Power P1: 430 W
- Rated current: 2.1 A
- Maximum liquid temperature: 45 °C
- Maximum liquid density: 1.1 kg/dm<sup>3</sup>
- pH range: 5 to 8

### PUMP

- Maximum flow rate: 250 L/min
- Maximum total head: 7 m
- Free passage diameter: 10 mm
- Connection: G 1 1/4" internal thread

## CABLE AND PLUG

- Power cable: H07 RN-F 3G1.0, 10 m
- Plug: Schuko IP44

## DIMENSIONS AND WEIGHT

- Dimensions (L × W × H): 18 × 18 × 28 cm
- Weight: 5 kg

The MAST K2 stands out for its reliability, compactness, and efficiency in pumping dirty water under demanding conditions. Its robust, mobile design makes it ideal for basement drainage, flooded areas, and temporary wastewater pumping.

## Caractéristiques

- Dimensions : 18 × 18 × 28 cm
- Weight : 5 kg
- Maximum flow : 250 L/min