


MAST K3 DEWATERING PUMP MAXIMUM FLOW RATE 300L/MIN

<https://www.securhit.com/en/dewatering-pumps/1233-pompe-d-epuisement-mast-k3-debit-max-300l-min.html>

MAST K3 Dewatering Pump □ Mobile and Robust for Dirty Water

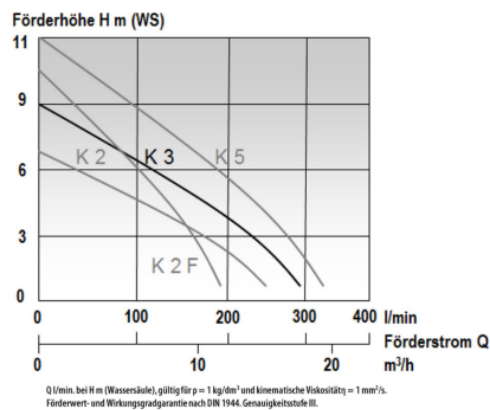

Description

The MAST K3 pump, from the MAST K range, is designed for pumping dirty and wastewater in demanding environments. Compact and lightweight, it combines performance, durability, and robustness thanks to its fiberglass-reinforced plastic body, stainless steel motor housing, and triple mechanical shaft seal. It is particularly suitable for mobile pumping of basements, flooded areas, or rainwater.

TECHNICAL SPECIFICATIONS

MOTOR

- Power supply: 230 V
- Power P1: 650 W
- Rated current: 3.1 A
- Maximum liquid temperature: 45 °C
- Maximum liquid density: 1.1 kg/dm³
- pH range: 5 to 8

PUMP

- Maximum flow rate: 300 L/min
- Maximum total head: 9 m
- Free passage diameter: 10 mm
- Connection: G 1 1/4" internal thread

CABLE AND PLUG

- Power cable: H07 RN-F 3G1.0, 10 m
- Plug: Schuko IP44

DIMENSIONS AND WEIGHT

- Dimensions (L × W × H): 18 × 18 × 28 cm
- Weight: 6 kg

The MAST K3 stands out for its reliability, robustness, and ability to handle dirty water in challenging conditions. Its durable, lightweight, and compact design makes it ideal for mobile pumping operations requiring fast and efficient water removal.

Caractéristiques

- Dimensions : 18 × 18 × 28 cm
- Weight : 6 kg
- Maximum flow : 300 L/min