


MAST K5 DEWATERING PUMP FLOW RATE 330L/MIN

<https://www.securhit.com/en/dewatering-pumps/1234-pompe-d-epuisement-mast-k5-debit-330l-min.html>

MAST K5 Dewatering Pump □ Mobile and Powerful for Dirty Water

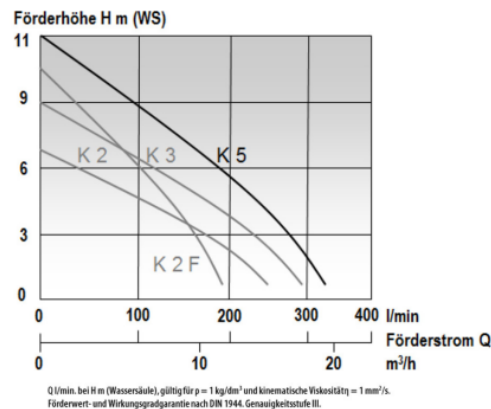

Description

The MAST K5 pump, from the MAST K range, is designed for efficient pumping of dirty and wastewater in demanding environments. Robust and compact, it combines performance, durability, and mobility, featuring a fiberglass-reinforced plastic body and a stainless steel motor housing. The triple mechanical shaft seal ensures safe operation and long service life, even under challenging conditions. The MAST K5 is ideal for mobile pumping of basements, flooded areas, rainwater, or light wastewater, providing a reliable solution for temporary water removal operations.

TECHNICAL SPECIFICATIONS

MOTOR

- Power supply: 230 V
- Power P1: 810 W
- Rated current: 3.7 A
- Maximum liquid temperature: 45 °C
- Maximum liquid density: 1.1 kg/dm³
- pH range: 5 to 8

PUMP

- Maximum flow rate: 330 L/min
- Maximum total head: 11 m
- Free passage diameter: 10 mm
- Connection: G 1 1/4" internal thread

CABLE AND PLUG

- Power cable: H07 RN-F 3G1.0, 10 m
- Plug: Schuko IP44

DIMENSIONS AND WEIGHT

- Dimensions (L × W × H): 18 × 18 × 28 cm
- Weight: 7 kg

The MAST K5 stands out for its power, robustness, and ability to efficiently pump dirty water in demanding conditions. Its compact and mobile design allows for quick and reliable operation in basements, flooded areas, rainwater management, or temporary wastewater pumping.

Caractéristiques

- Dimensions : 18 × 18 × 28 cm
- Weight : 7 kg
- Maximum flow : 330 L/min