


## WILDFIRE MULTI-FLOW NOZZLE VIPER ATTACK 540 WITH GFR COUPLING

<https://www.securhit.com/en/nozzles-and-monitors/318-lance-multi-debit-viper-attack-540-rylstatic-25-150-lpm-raccord-gfr-20-alu.html>

VIPER ATTACK 540 Fire Hose Nozzle - Efficient, Lightweight & Versatile

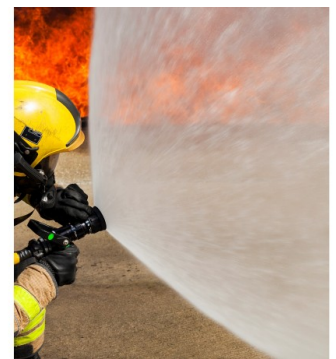

### Description

The VIPER ATTACK 540 nozzle with variable flow and jet (LDV) is designed for firefighting in the most demanding conditions, especially forest and rural fires. Its versatility provides control, efficiency, and safety for professional firefighters.

#### Innovative RYLSTATIC Fog System

Equipped with the patented RYLSTATIC system, the VIPER ATTACK 540 is an improved alternative to traditional fixed teeth or rotating turbines. It produces a wide, uniform fog of fine droplets, enhancing humidification capacity and forming a protective shield for firefighters.

#### Durable Construction and High-Quality Materials

- Body made of anodized aluminum alloy with a rubber bumper protecting the nozzle head
- Unbreakable polymer shut-off valve handle
- Rotating inlet connection for easy handling
- Pistol grip for optimal control
- High-quality internal spherical ball with double seat and double axis for resistance to water hammer and long-lasting durability
- Stainless steel filter at the inlet to prevent debris from entering

#### Precise Flow and Jet Control

- Variable flow and purging via indexed ring rotation
- Jet adjustment by rotating the nozzle head: full jet, attack spray, or protective spray
- Smooth and progressive operation, even under pressure

#### Compatibility and Options

- DN25 / 1" inlet with BSP rotating thread, compatible with GFR20, SYM20, or other fittings on request
- Low-expansion foam generation possible with CEP VA special nozzle tip
- High-pressure 40 bar version available on request

- Customizable handles in six colors for team identification
- Manufactured in an ISO 9001-certified factory, compliant with EN15182-1, EN15182-2, and NFPA 1964

#### Technical Specifications

- Flow at 6 bar: 25 □ 50 □ 75 □ 150 l/min
- Reach at 6 bar: 16 □ 20 □ 22 □ 25 m depending on flow
- Length: 20.0 cm
- Weight: 1.35 □ 1.5 kg
- Inlet: DN25 / 1□□ compatible with GFR20, SYM20, or other fittings
- Additional versions and configurations available on request

The VIPER ATTACK 540 nozzle is ideal for forest and rural firefighters, providing high performance, safety, and maneuverability in the most challenging conditions.

## Caractéristiques

- Weight : 1.5 kg
- Selectable flows : 25 - 50 - 100 - 150 l./mn à 6 bar