
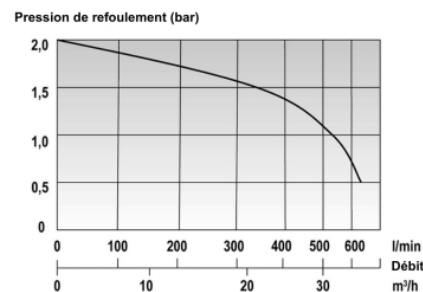


ELECTROPUMP STAINLESS STEEL CENTRIFUGE GUP3 - 1.5 ATEX

<https://www.securhit.com/en/depollution-nrbc/335-electropompe-centrifuge-inox-gup3-15-atex.html>

GUP3 - 1.5 ATEX Stainless Steel Centrifugal Electric Pump - Pump for Hazardous Liquids and Explosive Atmospheres

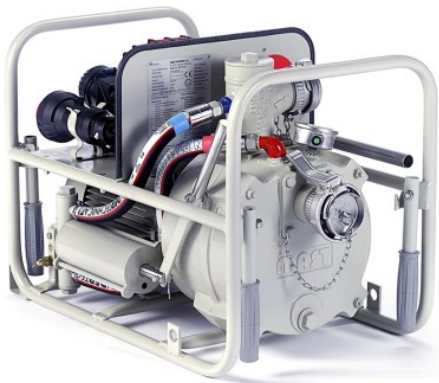

Description

The GUP3 - 1.5 ATEX stainless steel centrifugal electric pump is designed for the transfer of hazardous, flammable, and aggressive liquids in high-risk environments. ATEX certified, it is suitable for use in explosive atmospheres and confined areas (Zones 1 and 2), ensuring both safety and performance. Robust and reliable, this three-phase pump is intended for industrial applications and demanding fluid transfer operations involving sensitive liquids.

Main applications

- Transfer of flammable liquids
- Pumping of solvents, acids, and aggressive chemicals
- Operation in ATEX Zones 1 and 2
- Industrial and environmental high-risk applications
- Handling of fluids with solids up to 10 mm

ATEX certification

Certified ATEX EEx II 2G c IIB T3, this pump is approved for use in explosive atmospheres, ensuring a high level of safety in hazardous working environments.

Technical and general specifications

- Type: three-phase centrifugal electric pump
- Power supply: 3~ 400 V / 50 Hz
- Power: 3 kW (4.55 A)
- Maximum flow rate: 620 l/min

- Maximum pressure: 2 bar
- Maximum suction head: 8.4 m
- Maximum particle size: 10 mm
- Materials: stainless steel V4A (pump body, shaft, volute)
- Fasteners: stainless steel V2A
- Connections: 2" threaded inlet/outlet, compatible with Camlock, Storz or symmetrical couplings (on request)
- Dimensions: 62 x 39 x 46 cm
- Weight: 81 kg

Performance and durability

The GUP3 - 1.5 ATEX delivers a high flow rate of up to 620 l/min, ensuring fast and efficient fluid transfer. Its stainless steel construction provides excellent resistance to corrosion and aggressive chemicals, even under intensive use.

The GUP3 - 1.5 ATEX stainless steel centrifugal electric pump is a safe and high-performance solution for handling hazardous liquids in demanding industrial environments and ATEX-rated zones.

Caractéristiques

- Dimensions : 62 x 39 x 46 cm
- Weight : 81 kg
- Maximum flow : 620 l/min