


60 M3/H PRESSURE WASTE WATER PUMP ATP10RL SINGLE-PHASE WITH DSP65 FITTING

https://www.securhit.com/en/dewatering-pumps/443-354-electropompe-eau-chargee-60-m3-h-atp10rl-monophas-avec-raccords-dsp65.html#/355-type_prise_electropompe-prise_16a

ATP 10 RL Submersible Pump □ High-Performance for Wastewater

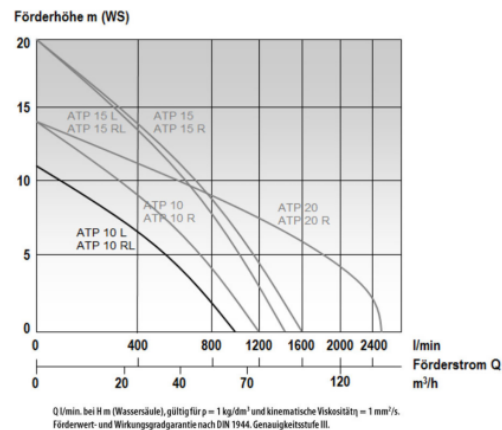

Description

The ATP 10 RL submersible pump is designed for pumping untreated wastewater containing particles and long-fiber solids. With a 65 mm free passage, this pump ensures clog-free operation, even with heavily loaded water.

Suitable for submersible or dry installation, it can be connected to appropriate hoses to efficiently transport water to the discharge point.

TECHNICAL SPECIFICATIONS

MOTOR

- Power supply: 230 V / 50 Hz
- Power P1: 1.8 kW
- Rated current: 8.4 A
- Maximum immersion depth: 20 m
- Maximum fluid temperature: 60 °C
- Maximum fluid density: 1.1 kg/dm³
- pH range: 5 □ 8

PUMP

- Maximum flow rate: 1000 L/min
- Maximum total head: 11 m (1.1 bar)
- Free passage diameter: 65 mm
- Connections: G 3" / G2.5" (suction / discharge)

- Storz connection: Storz B
- Operation: submersible, clog-free, flat suction possible
- Installation: portable, series connection possible

CABLE AND PLUG

- Power cable: H07 RN-F 3G1.5, 20 m
- Plug options: 16 A plug or Marechal DS1

DIMENSIONS AND WEIGHT

- Dimensions (L x W x H): 44 x 26 x 43 cm
- Weight: 27 kg

The ATP 10 RL stands out for its power, robustness, and ability to efficiently pump solids-laden wastewater. Its large free passage and submersible operation make it a reliable solution for industrial, municipal, or residential wastewater pumping, whether submerged or installed dry.

Caractéristiques

- Dimensions : 44 x 26 x 43 cm
- Weight : 27 Kg