


90 M3/H ATP15RL SINGLE-PHASE WASTE WATER PUMP WITH DSP65 FITTING

https://www.securhit.com/en/dewatering-pumps/444-356-electropompe-eau-chargee-90-m3-h-atp15rl-monophas-avec-raccords-dsp65.html#/355-type_prise_electropompe-prise_16a

Wastewater pump

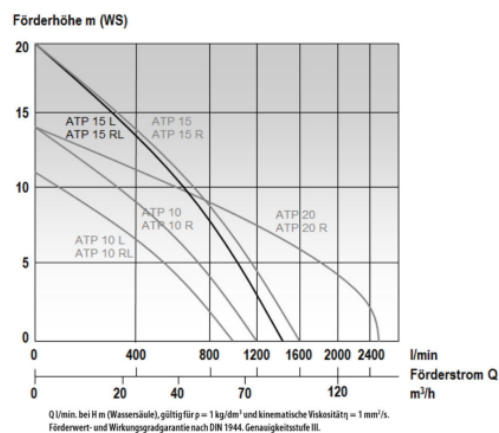

Description

The ATP 15 RL submersible pump is designed for pumping untreated wastewater, containing particles and solids up to 65 mm in diameter. With its 230 V electric motor and clog-free operation, it can be installed submersed or dry, ensuring efficient and continuous pumping even with heavily loaded water. Suitable for mobile applications, it can be connected to rigid or flexible hoses to discharge water effectively.

TECHNICAL SPECIFICATIONS

MOTOR

- Power supply: 230 V / 50 Hz
- Power P1: 2.7 kW
- Rated current: 13.0 A
- Maximum immersion depth: 20 m
- Maximum fluid temperature: 60 °C
- Maximum fluid density: 1.1 kg/dm³
- pH range: 5 □ 8

PUMP

- Maximum flow rate: 1500 L/min
- Maximum total head: 20 m (2.0 bar)
- Free passage diameter: 65 mm
- Connections: G 3" / G2.5" (suction / discharge)

- Storz connection: Storz B
- Operation: submersible, clog-free, flat suction possible
- Installation: portable, series connection possible

CABLE AND PLUG

- Power cable: H07 RN-F 3G 1.5, 20 m
- Plug options: 16 A plug or Marechal DS1

DIMENSIONS AND WEIGHT

- Dimensions (L x W x H): 46 x 26 x 43 cm
- Weight: 37 kg

The ATP 15 RL stands out for its power, reliability, and ability to efficiently pump solids-laden wastewater. Its 65 mm free passage and 230 V motor enable continuous, clog-free operation, whether submerged or installed dry, for industrial, municipal, or residential wastewater applications.

Caractéristiques

- Dimensions : 46 x 26 x 43 cm
- Weight : 37 kg